


Two level atom - with periodic excitation

"There are no two level atoms and Rubidium is not one of them"

Bill Phillips (Noble prize winner)

Nevertheless it is useful approximation

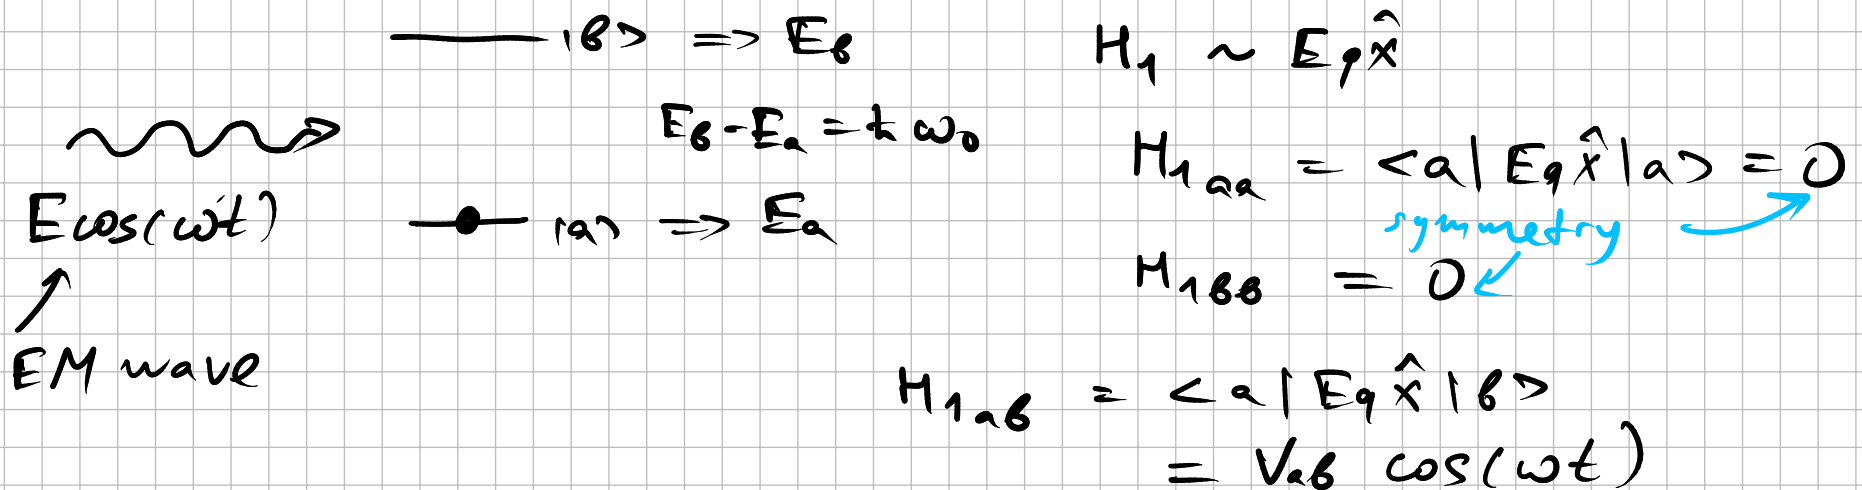

$$H_1 \sim E_0 \hat{x}$$
$$H_{1aa} = \langle a | E_0 \hat{x} | a \rangle = 0$$
$$H_{1bb} = 0$$
$$H_{1ab} = \langle a | E_0 \hat{x} | b \rangle = V_{ab} \cos(\omega t)$$

Last time we derived

$$c_f(t) = \delta_{fi} - \frac{i}{\hbar} \int_0^t e^{i(E_f - E_i)t'/\hbar} \langle f | H_1 | i \rangle dt'$$


$|c_a(0)|^2 = 1$ i.e. atoms initially in 'a' state

$$|c_b(0)|^2 = 0$$

$$c_b(t) = -\frac{i}{\hbar} \int_0^t e^{i\omega_0 t'} V_{ab} \cos(\omega t') dt'$$

$$= -\frac{i V_{ab}}{\hbar} \int_0^t e^{i\omega_0 t'} \frac{(e^{i\omega t'} + e^{-i\omega t'})}{2} dt'$$

$$= -\frac{i V_{ab}}{2\hbar} \left[\frac{e^{i(\omega_0 + \omega)t'}}{\omega_0 + \omega} + \frac{e^{i(\omega_0 - \omega)t'}}{\omega_0 - \omega} \right]_0^t$$
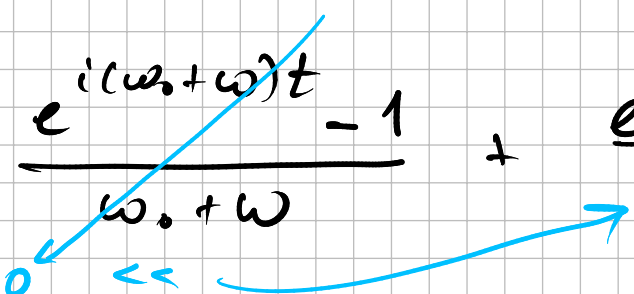
$$= -\frac{i V_{ab}}{2\hbar} \left[\frac{e^{i(\omega_0 + \omega)t} - 1}{\omega_0 + \omega} + \frac{e^{i(\omega_0 - \omega)t} - 1}{\omega_0 - \omega} \right]$$


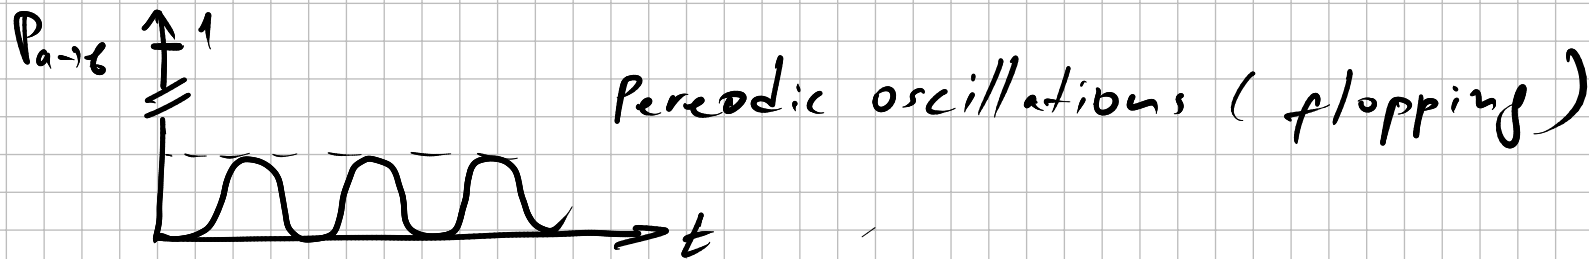
for optical transitions $\omega_0 \approx 10^{14} \text{ Hz}$, RF $\omega_0 \approx 10^{10} \text{ Hz}$

$$c_b(t) = -\frac{i V_{ab}}{2\hbar} \frac{e^{i(\omega_0 - \omega)t} - 1}{\omega_0 - \omega} = -\frac{i V_{ab}}{\hbar} (i) \frac{e^{i\frac{(\omega_0 - \omega)t}{2}} - e^{-i\frac{(\omega_0 - \omega)t}{2}}}{2(\omega_0 - \omega)} e^{+i\frac{(\omega_0 + \omega)t}{2}}$$

$$C_b(t) = \frac{V_{ab}}{\hbar} \frac{\sin\left(\frac{\omega_0 - \omega}{2}t\right)}{\omega_0 - \omega} e^{i\left(\frac{\omega_0 - \omega}{2}t\right)}$$


$$\Rightarrow P_{a \rightarrow b}(t) = |C_b(t)|^2 = \frac{|V_{ab}|^2}{\hbar^2} \frac{\sin^2\left(\frac{\omega_0 - \omega}{2}t\right)}{(\omega_0 - \omega)^2}$$

probability to move from level 'a' to 'b'



$$P_{a \rightarrow b \text{ max}} = \left| \frac{V_{ab}}{\hbar (\omega_0 - \omega)} \right|^2 = \left| \frac{V_{ab}}{\hbar \Delta\omega} \right|^2 \quad \text{at } \frac{\omega_0 - \omega}{2}t = \frac{\pi}{2} + n\pi$$

$\Delta\omega$ detuning

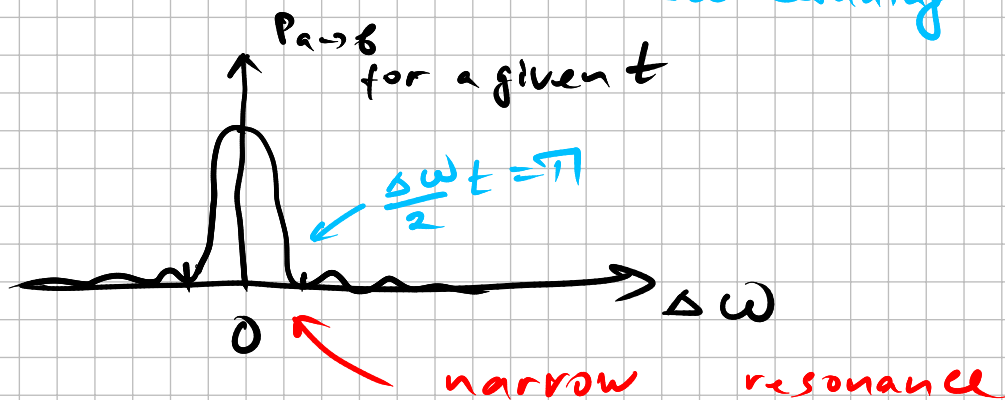

one issue

$$P_{a \rightarrow b \text{ max}} \xrightarrow{\Delta\omega \rightarrow 0} \infty$$

1st it cannot be > 1
 $\Rightarrow$ 2nd we out of perturbation regime!

Two level atom exact (almost) solution

Recall that during time perturbation derivation we got the exact expressions for $C_n(t)$

$$\frac{d}{dt} C_f(t) = -\frac{i}{\hbar} \sum_n C_n(t) e^{i \frac{(E_f^{(0)} - E_n^{(0)})}{\hbar} t} \langle \psi_f | H_1(t) | \psi_n \rangle$$

for the two level case and H_1 which has only off diagonal elements

$$H_{1ab} = V_{ab} \cos(\omega t)$$

we have

$$\begin{cases} \frac{d}{dt} C_a(t) = -\frac{i}{\hbar} C_b(t) e^{-i\omega_0 t} V_{ab} \cos(\omega t) \\ \frac{d}{dt} C_b(t) = -\frac{i}{\hbar} C_a(t) e^{+i\omega_0 t} V_{ab}^* \cos(\omega t) \end{cases}$$

$$\begin{cases} \dot{C}_a(t) = -\frac{i}{\hbar} C_b(t) e^{-i\omega_0 t} \frac{e^{i\omega t} + e^{-i\omega t}}{2} V_{ab} e^{-i(\omega_0 + \omega)t} \\ \dot{C}_b(t) = -\frac{i}{\hbar} C_a(t) e^{+i\omega_0 t} \frac{e^{-i\omega t} + e^{i\omega t}}{2} V_{ab}^* e^{+i(\omega_0 + \omega)t} \end{cases}$$

fast oscillations
we drop them

$$H_1 = V_{ab} \cos(\omega t) \rightarrow V_{ab} e^{-i\omega t}$$

Rotating wave approximation

Why do we drop them?

they would force C_a, C_b oscillate with frequency $(\omega_0 + \omega) \sim 10^{14}$ which is **HUGE**

there are no detectors which are that fast!
So, who cares about such terms.

$$\begin{cases} \dot{C}_a(t) = -\frac{i}{2\hbar} C_b(t) e^{-i(\omega_0 - \omega)t} V_{ab} \\ \dot{C}_b(t) = -\frac{i}{2\hbar} C_a(t) e^{i(\omega_0 - \omega)t} V_{ab}^* \end{cases}$$

There is a general solution
 but we will do the case of zero detuning
 $\Delta\omega = 0 \iff \omega_0 = \omega$

$$\begin{cases} \dot{C}_a = -\frac{i}{2\hbar} C_b V_{ab} \\ \dot{C}_b = -\frac{i}{2\hbar} C_a V_{ba} \end{cases}$$

$$\begin{cases} \ddot{C}_a = -\frac{i}{2\hbar} \dot{C}_b V_{ab} = -\frac{V_{ab} \cdot V_{ba}}{\hbar^2} C_a = -\frac{|V_{ab}|^2}{\hbar^2} C_a \\ \ddot{C}_b = -\frac{|V_{ab}|^2}{\hbar^2} C_b \end{cases}$$

Well we know the solution $C = A \cos \Omega t + B \sin \Omega t$


where $\Omega = \frac{|V_{ab}|}{2\hbar}$, Rabi frequency

let's use initial condition $C_a(0) = 1 \leftarrow$ everything at ground level
 $C_b(0) = 0$

$$C_a = \cos(\Omega t), \quad C_b = \sin(\Omega t)$$

by the way if $\Delta\omega = 0 \Rightarrow$

$$\Omega = \frac{1}{2} \sqrt{\Delta\omega^2 + \left(\frac{|V_{ab}|}{\hbar}\right)^2}$$

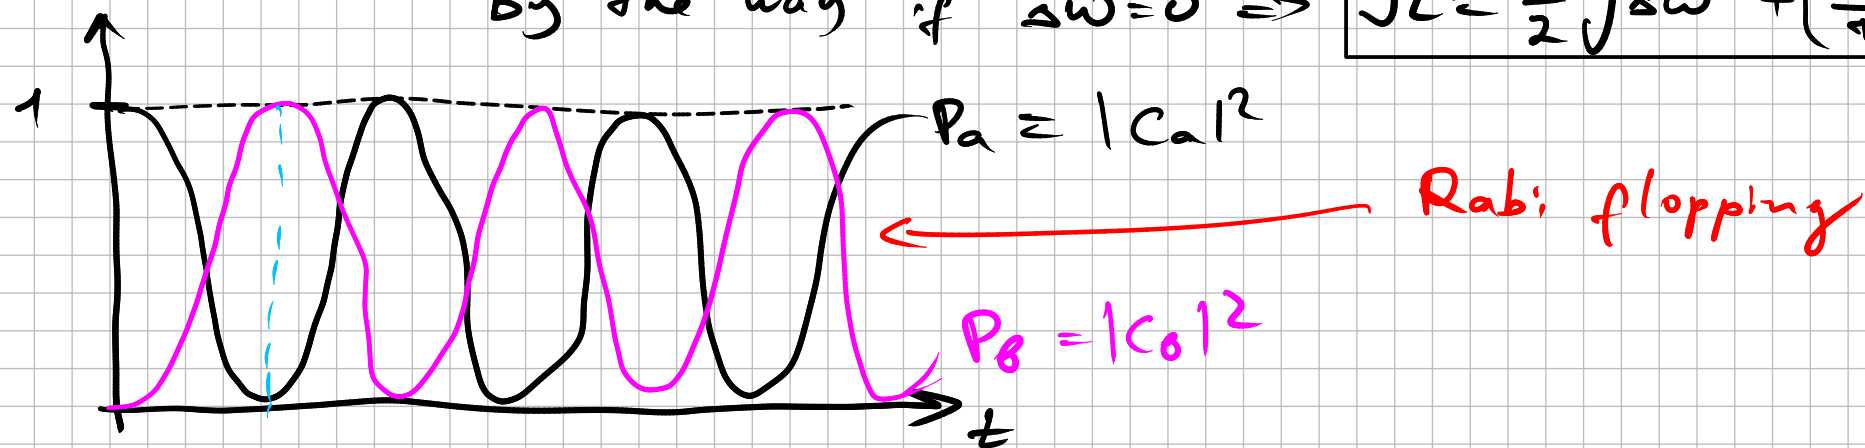


$$\tilde{\tau}: \Omega \tilde{\tau} = \pi$$

so called π pulse time

which brings all population from 'a' to 'b'

Now we can do quantum control

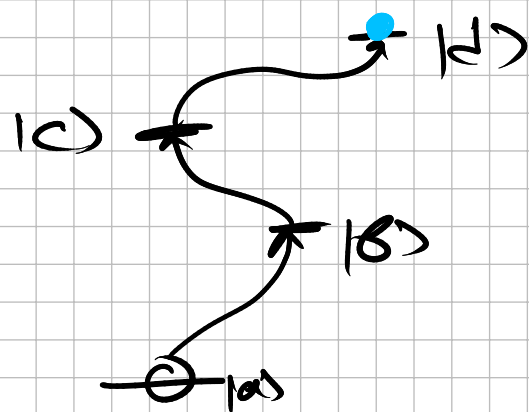

i.e. populate any level even
if we cannot generate
 $\omega = \omega_c - \omega_a$

HW: show that for
 $\Delta\omega = 0$ and $t \rightarrow 0$
perturbation theory gives the same
answer